


Bergen Cabling DNV GL approved Maritime LAN Cat.6A connector

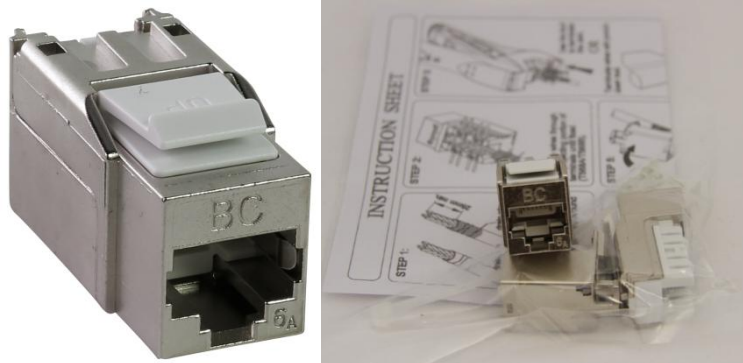

10 Gigabit BC Keystone Cat.6A connector

Fully screened Cat.6A connector RJ 45 for communication up to 500 MHz, 100 Ω .

The connector can be used with the Maritime LAN 24 port Patchpanel and outlets fits for the connector in a Cat.6A installation, or keystone interface from other vendors.

The connector is made for application up to 10 Gigabit Ethernet on solid wires, and shall be handled according to installation manual and together with the tool for the connector.

Characteristics

Operating temperature range : -40 to +70 °C (up to +65°C for an uninterrupted use)

Dimensions (L x P x W) : 17.6 x 34 x 25.5 mm (with rear cover)

Standards

ISO/IEC 11801, 2nd edition :2002

ISO/IEC 11801 amendment 2:2010

EN 50173-1: 2007

ANSI /TIA 568-C.2

IEC 60603-7-51

Approved by

Delta Compliance Statement no. 2014-351

Det Norske Veritas (DNV GL) certificate No: TAE0000008

Ordering info

Part No.	Part Name
BC-11-004	Connector Cat6A STP Bergen Cabling