


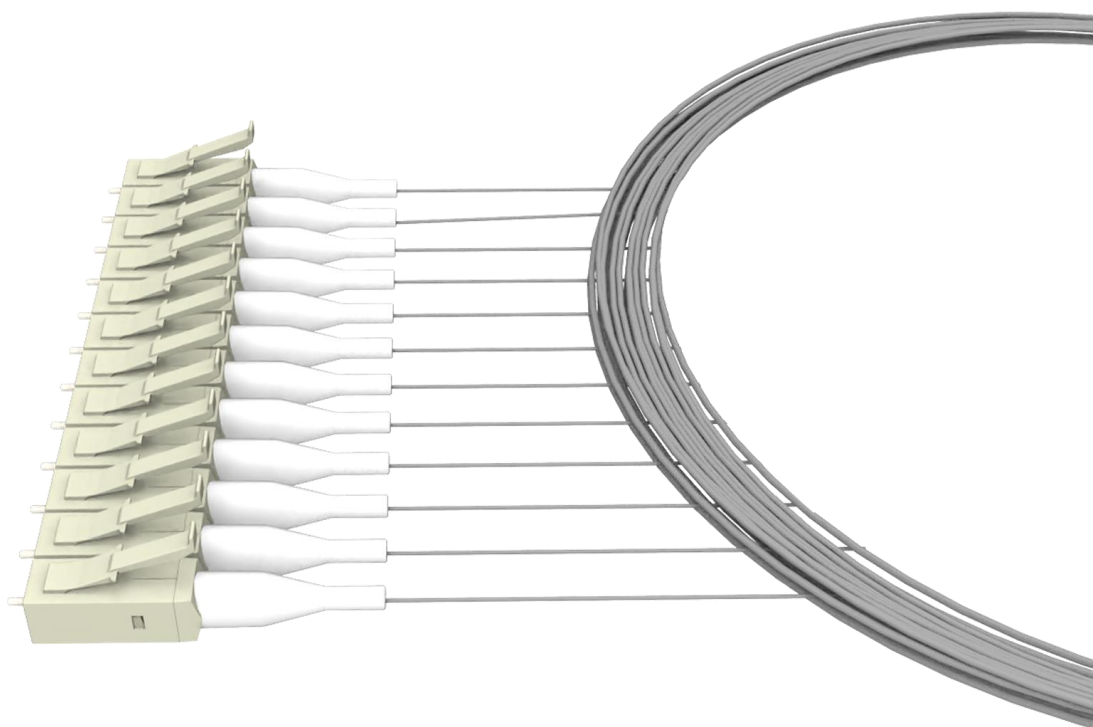

P/N	Product Description
LC62B2GY-12	Fiber Pigtail MM, OM1, 62.5/125um, 0.9-Simplex,Tight Buffer, Grey color, LSZH, LC (MM), 2M, 12PCS

Features

- Comply with IEC 60793-2-10, ANSI/TIA-492AAAF, TIA/EIA-604-10 standard
- Excellent performance for on site installation
- Applied to Data Center, FTTx, telecommunication networks, CATV, CCTV

Specification

Fiber Count	1 Fiber	Fiber Type	62.5/125um
Connector	LC Simplex OM1	Fiber Extension	$-0.05\mu\text{m} < H < +0.05\mu\text{m}$
Insert Loss	<0.5dB	Return Loss	> 35dB
Φ1.25mm Ferrule End-face Radius	$7 < R < 25\text{mm}$	Apex Offset	< 50um
Operating Temperature	-20~+70°C	Storage Temperature	-40~+80°C

