


OM3 Simplex/Duplex Enhanced Patch Cord

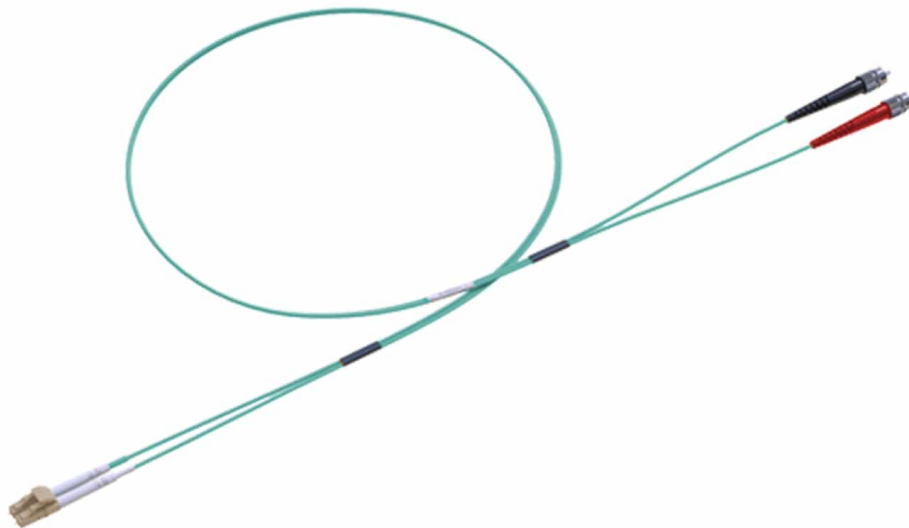

Description

Multimode patch cords are used to connect high speed and legacy networks like 10 gigabit ethernet, fast ethernet and ethernet. The multimode patch cords are manufactured for internal use using LSZH cables which conform to IEC, EIA TIA or Telcordia standards. The OM3 enhanced patch cords are terminated with optimized connectors which gives optimum optical performance.

Features and Benefits

- E2000, FC, LC, MTRJ, SC and ST connectors
- 900 μ m / 600 μ m tight buffer
- Reduced Bend Sensitivity (RBS) fiber used as standard
- Duplex assemblies available with clips (SC and LC)
- Armoured option also available
- Low smoke zero halogen (LSZH) cable in aqua or purple color
- OM3 fiber conforms to ITU-T G.651.1, TIA/EIA 492AAAC, IEC60793-2-10 A1a.2a
- Simplex and duplex assemblies
- Different connector performance range for specific application available
- REACH, RoHS & SvHC materials compliant

Applications

- For use in 10Gb/s high speed LAN networks over a 300 m indicative link length at 850 nm (SX) wavelength using a laser launch
- High speed and legacy networks including Gigabit Ethernet, Fast Ethernet and Ethernet
- Premises cabling in data networks including backbone, riser and horizontal
- For use in 1Gb/s high speed LAN networks over a 1000 m indicative link length at 850 nm (SX) wavelength using a laser launch
- Data centers
- Supports video, data and voice services

Specifications

Connector Specification

OPTICAL PERFORMANCE	MULTIMODE	CONFORMANCE
IL Max/Master (Acceptance)	0.25 dB	IEC 61300-3-4
Ave/Master	0.15 dB	IEC 61300-3-4
Ave/Random	0.20 dB	IEC 61300-3-34

Note: Return Loss ≥ 28 dB based on sample data using method IEC 61300-3-6

Cable Specification

CHARACTERISTICS	SIMPLEX	DUPLEX
Cable Material	LSZH	LSZH
Strength Member	Aramid	Aramid
Crush (N)	1000	1000
Operating Temperature (°C)	-20 to 60	-20 to 60
Fire Specification	IEC 60332-1	IEC 60332-1

Fiber Specification

CHARACTERISTICS	
Attenuation (dB / km)	2.8 @ 850 nm / 0.8 @ 1310 nm
Bandwidth OFL (MHz x km)	1500 @ 850 nm / 500 @ 1310 nm
Bandwidth LEMB (MHz X km)	2000 @ 850 nm

Ordering Information

Code	Cable Type	Jacket Material	Color	Code	End A	End B	Code	Unit	Length
P3	AH1 Simplex 2mm	L LSZH	C AQUA	E	A LC	A LC	-0000-	M Meters	1 1
	AK1 Simplex 3mm	R OFNR	D ERIKA VIOLET		D SC	D SC		F Feet	2 2
	AQ2 ZIP 2mm				H FC	H FC			3 3
	AT2 ZIP 3mm				K ST	K ST			5 5

	AU2	Flat 2mm									L	E2	L	E2						10	10
	AV2	Flat 2.8mm																		XX	Specify

Related Products



LC Connectors



SC Connector



ST Connectors



FC Connectors



FCP2 Fiber Cleaning Kit for
SC/ST/FC/LC



One-Click® Cleaner SC/ST/FC



One-Click® Cleaner D-LC,
Duplex LC



FOCIS Flex Fiber Scope