




P/N	Product Description
LC09B2YE	Fiber Pigtail SM(G.657.A1),9/125um, 0.9-Simplex,Tight Buffer, Yellow, LSZH, LC (SM UPC),2M, 1PC
LC09B2YE-12	Fiber Pigtail SM(G.657.A1),9/125um, 0.9-Simplex,Tight Buffer, Yellow, LSZH, LC (SM UPC),2M, 12PCS

Features
- Comply with IEC 60793-2-50, ANSI/TIA-492CAAC, TIA/EIA-604-10 standard - Excellent performance for on site installation - Applied to Data Center, FTTx, telecommunication networks, CATV, CCTV

Specification			
Fiber Count	1 Fiber	Fiber Type	G.657A1 9/125μm
Connector	LC Simplex UPC	Fiber Extension	-0.05μm < H < +0.05μm
Insert Loss	<0.3dB	Return Loss	> 55dB
Φ1.25mm Ferrule End-face Radius	7 < R < 25mm	Apex Offset	< 50um
Operating Temperature	-20~+70°C	Storage Temperature	-40~+80°C

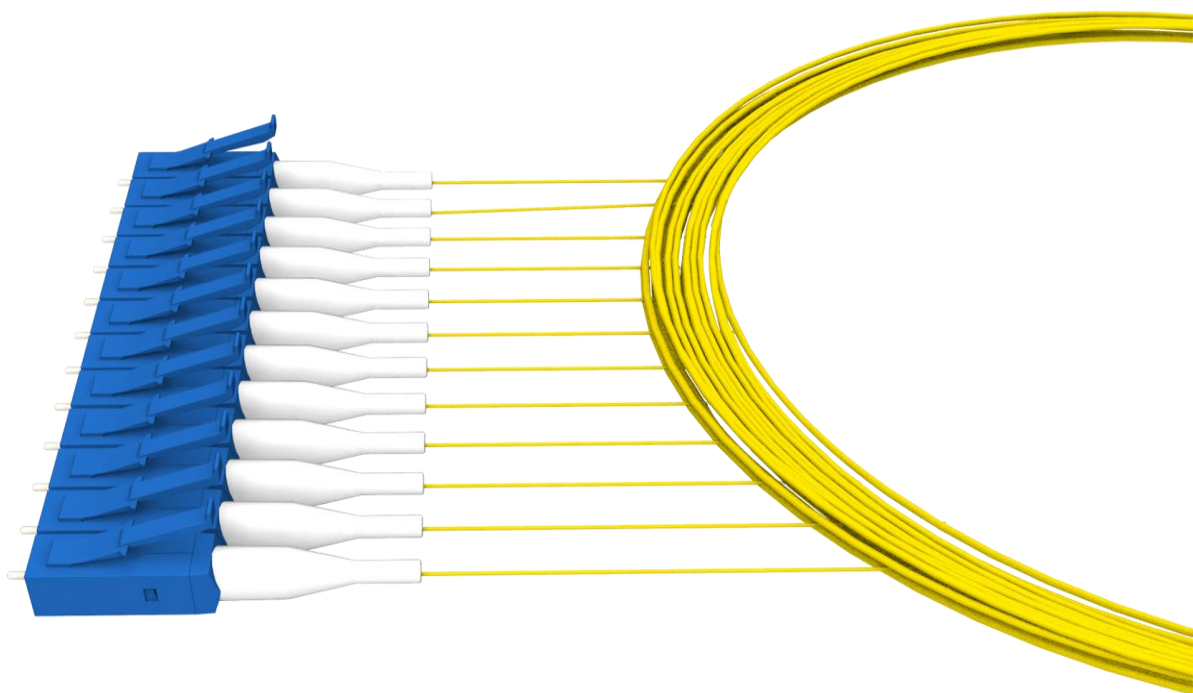