OM3 Multimode Enhanced Pigtail

OM3 multimode enhanced pigtails are used to connect high speed networks like gigabit ethernet, fast ethernet and ethernet. The multimode pigtail buffer conforms to IEC, EIA TIA or Telcordia standards. The multimode pigtails are terminated with optimized connector which gives optimum optical performance.

Features

- SC, LC, ST, FC connectors
- Low smoke zero halogen (LSZH) buffer
- 900 μm tight buffer or easy strip
- OM3 Pigtail is available in standard purple or aqua color
- Multimode Fiber conforms to ITU-T G.651.1, TIA/EIA 492AAAC
- Different connector performance range for specific application available
- Available in standard 12 colors as per IEC 60304
- Available in standard and blister packing
- REACH, RoHS & SvHC materials compliant

Applications

- Networks including Ethernet, Fast Ethernet and GBE
- Internal inter-connect
- Ideal for a wide range of telecom, datacom and process control applications where ruggedisation is required
- Suitable for repeated handling in patch panels and racks

Specifications

Connector Specification


OPTICAL PERFORMANCE	MULTIMODE	CONFORMANCE
IL Max/Master (Acceptance)	0.25 dB	IEC 61300-3-4
Ave/Master	0.15 dB	IEC 61300-3-4
Ave/Random	0.20 dB	IEC 61300-3-34

Note: Return Loss >28dB based on sample data using method IEC 61300-3-6

Cable Specification

CHARACTERISTICS	UNITS	SIMPLEX
Crush	N/100 mm	500
Operating Temperature	°C	-20 to 60

n/product/om3-multimode-enhanced-pigtail/. AFL reserves the right to make changes in this datasheet at any ti

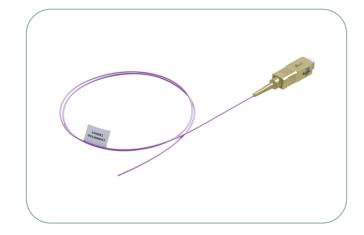

FAFL

CHARACTERISTICS	UNITS	SIMPLEX		
Stripping Length - Easy Strip	m	1.5 minimum		
Stripping Length - Tight buffer	mm	30 nominal		
Nominal buffer Diameter	μm	900 +/- 50		
Max Tensile Load	N	6		

Fiber Specification

CHARACTERISTICS	
Attenuation (dB / km)	2.8 @ 850 nm / 0.8 @ 1300 nm
Bandwidth OFL (MHz x km)	1500 @ 850 nm / 500 @ 1300 nm
Bandwidth EMBc (MHz x km)	2000 @ 850 nm

Ordering Information

Code		Cable Type		Fiber Count	Cod	e		Color	Gra	ade	Con	necto r		Code		Unit	Len	gth
Р3	AA	Easy Strip	1	Single Pigtail	L		6	WHITE	I	E	AX	LC	-0000-	Single Pigtail	М	Meters	1	1
	AC	Tight Buffered	В	Pack of 12		Τ	А	PURPLE			DX	SC	-0002-	12 in one Bag			2	2
			Γ			Τ	С	AQUA			ΗX	FC	-0004-	12 in Blister Pack				
							Н	12 Colours			KX	ST						

Legacy Ordering Information

Connec	ctor End	Fiber	Туре		Cab	ole Length	Cable Construction		
SC	SC	OM3	ОМЗ	В	1	1 metre		Tight Buffer	
LC	LC				2	2 metre	-12/1B	Tight Buffer - Pack of 12 colours	
FC	FC				3	3 metre	BP12-TB	Tight Buffer - Blister pack of 12	
ST	ST				5	5 metre	EASY	Easy strip	
					10	10 metre	E-12/1B	Easy strip - Pack of 12 colours	
					ХХ	Specify	BP12	Easy strip - Blister pack of 12	

Example Part Number

SC	ОМЗ	В	5	-12/1B
				<u></u>

This part number has created a 5 metre SC OM3 pack of 12 pigtails in different colours.

